


BACK FILL WITH CONCRETE AFTER INSTALLATION

BACK FILL WITH CONCRETE AFTER INSTALLATION

CONCRETE FOUNDATION SEE NOTE 'A' FOR DETAILS

CONCRETE FOUNDATION (2 - OFF) 400 x 400 x 250 DEEP

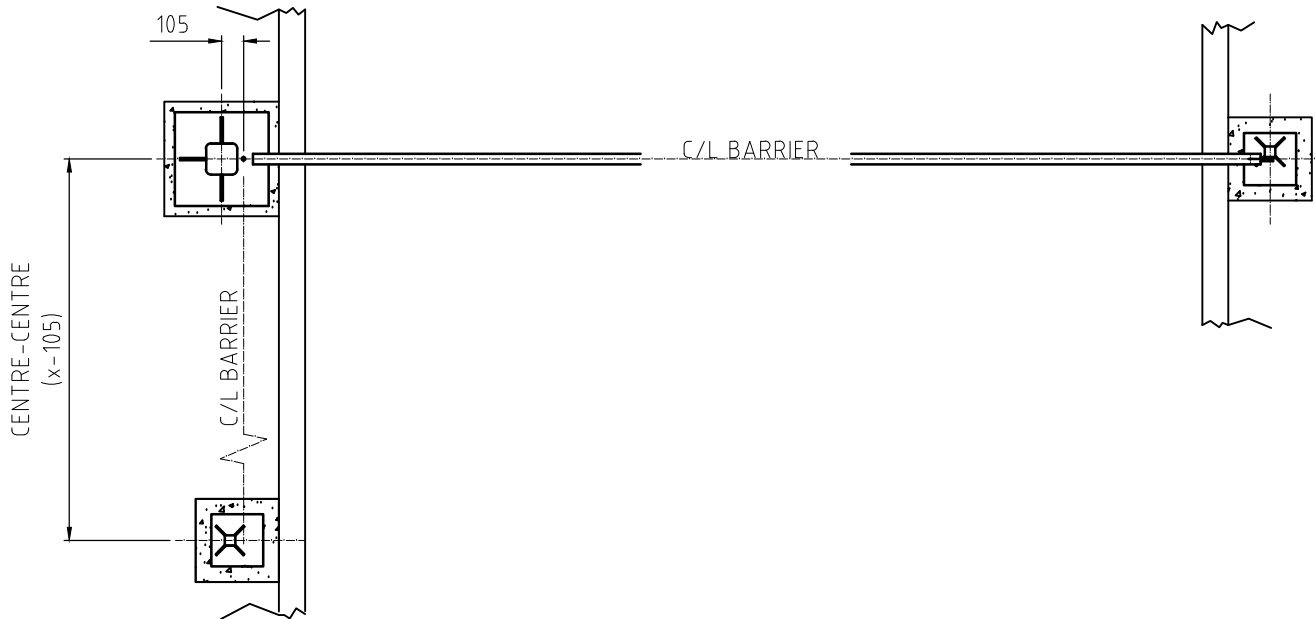


NOTE A :
 CONCRETE TO BE CAST A MINIMUM OF 7 DAYS BEFORE INSTALLATION OF EQUIPMENT.
 (GRADE C32-40 - 20mm GRAVEL)

550 x 550 x 500 DEEP
 (FOR SPANS UP TO 6500)

(750 x 750 x 600 DEEP FOR SPANS BETWEEN 6500 & 8000)

NOTE B :
 FOR SPANS UPON 6500mm 'y'=150mm
 FOR SPANS BETWEEN 6500mm & 9000mm 'y'=170mm

THIS DRAWING REMAINS OUR PROPERTY & MAY NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT OUR WRITTEN CONSENT



NEWGATE(Newark)LTD
 BRUNEL DRIVE, NEWARK, NOTTS, NG24 2DE
 TELEPHONE: (01636) 700172 & 704000
 FAX: (01636) 605400

IF IN DOUBT - STOP - ASK !

Issue	Date	Mod no.	Description	Drawn By	Ref.no.	Qnt.	Part name	Material	Dimension	Remark
A	15/8/06	0049	GATE KEEP AND LATCH UPDATED PICTORIALY	SRM						
B	11/3/08		DATUM DIMS CHANGED FROM SPAN TO CENTRE LINE OF FOUNDATIONS	SRM						
C	28/10/09		MODS TO SUIT CHANGE IN FABRICATION/HINGES	LAS						
					Outline & Foundations - 150sq SWING ARM BARRIER					
					Date	13/4/06	Drawn by	SRM	Scale	1:25
							Drawing no.	106/3/23976		