



CAPPING OPTIONS:
PALISADE, ROTA SPIKES, BARBED WIRE

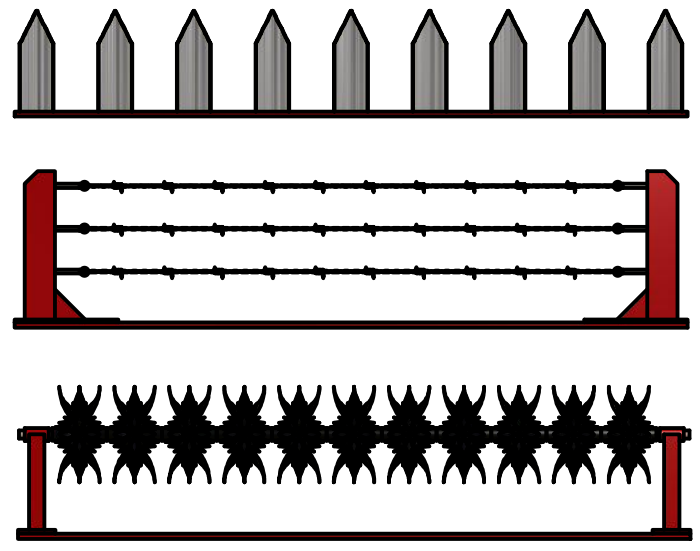

INFILL OPTIONS:

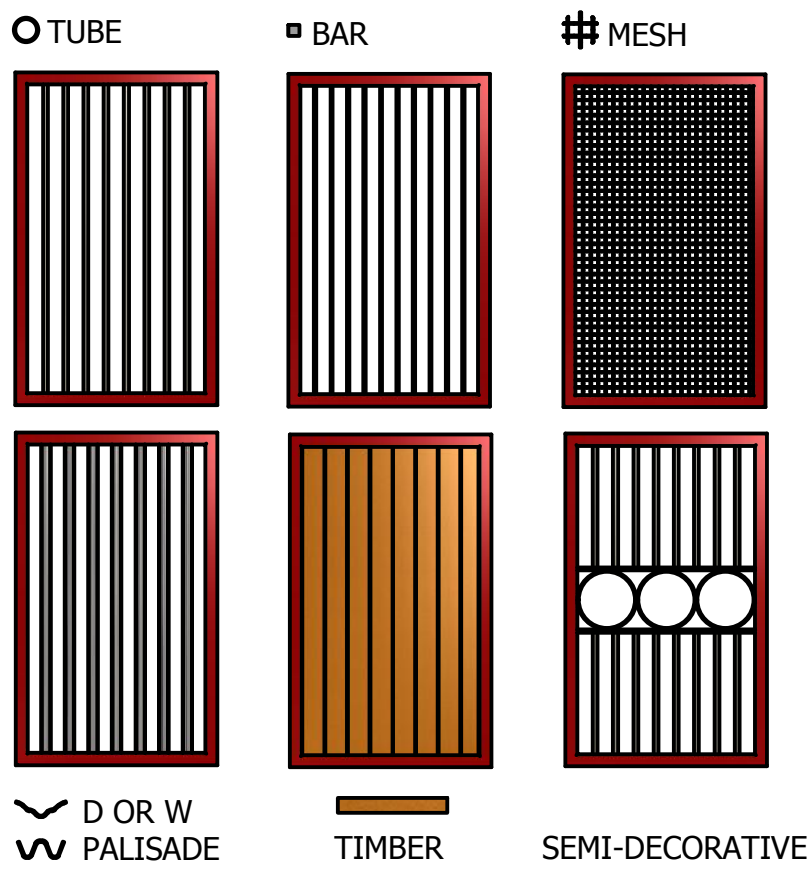

FOUNDATIONS:
CONCRETE TO BE CAST A MINIMUM OF 7 DAYS BEFORE
INSTALLATION OF EQUIPMENT.
(GRADE C32/40 20mm AGGREGATE)
BOTH FOUNDATIONS SHOULD BE SMOOTH, FLAT AND
LEVEL WITH EACH OTHER.

±1.0mm UOS	Finish AS PER CONTRACT		
DESIGNED BY josephs	MATERIAL AS PER CONTRACT	DATE 15/02/13	
NEWGATE (NEWARK) LTD BRUNEL DRIVE, NEWARK, NOTTS. NG24 2DE TELEPHONE 01636 700172 EMAIL SALES@NEWGATE.UK.COM		TITLE LAYOUT - MANUAL CANTILEVER SLIDING GATE (UP TO 9.5m SPAN)	
PART No 103-3-37456		ISSUE	SHEET 1 / 1