



ELECTRICAL SPECIFICATION:
 MAGLOCK : 24V.D.C, 480mA
 CONTROL PANEL : 230V.A.C, 1A

FOUNDATIONS:
 CONCRETE TO BE CAST A MINIMUM OF 7 DAYS BEFORE INSTALLATION OF EQUIPMENT.
 (GRADE C32/40 20mm AGGREGATE)
 FOUNDATION SHOULD BE SMOOTH, FLAT AND LEVEL.

CAPPING OPTIONS:
 PALISADE, ROTA SPIKES, BARBED WIRE

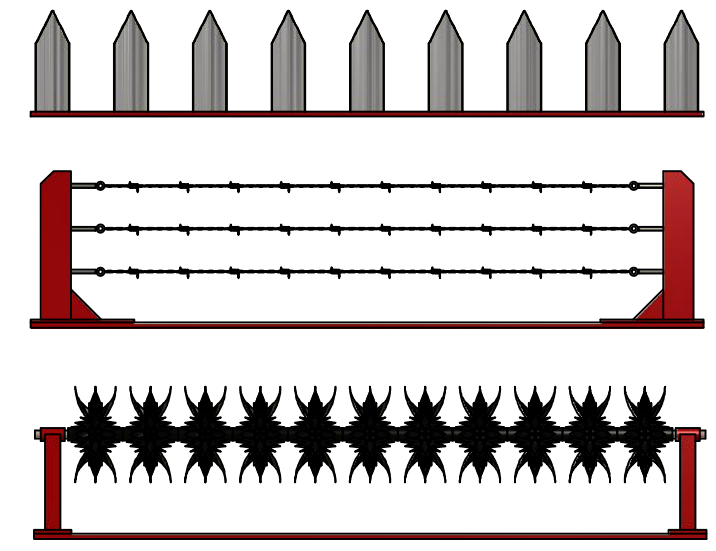

INFILL OPTIONS:

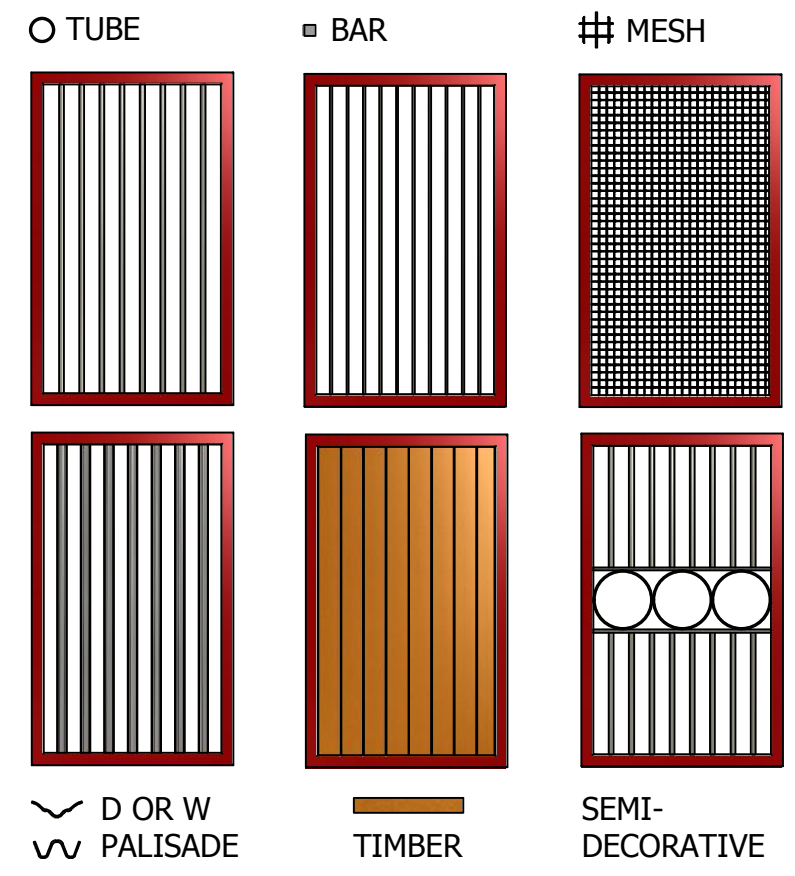

±1.0mm UOS	Finish AS PER CONTRACT		
DESIGNED BY josephs	MATERIAL AS PER CONTRACT	DATE 15/02/13	
NEWGATE (NEWARK) LTD BRUNEL DRIVE, NEWARK, NOTTS. NG24 2DE TELEPHONE 01636 700172 EMAIL SALES@NEWGATE.UK.COM		TITLE LAYOUT - SEMI-AUTO PEDESTRIAN GATE	
PART No 108-3-37472		ISSUE	SHEET 1 / 1