


114/670 BOLLARD STATISTICS					
	FULLY RETRACTABLE (Heavy Duty)	FULLY RETRACTABLE (Lightweight)	LIFT-OUT (Lightweight)	STATIC (Heavy Duty)	STATIC (Lightweight)
BOLLARD DIAMETER	114mm	114mm	114mm	114mm	114mm
CASING DIAMETER	150mm	150mm	150mm	N/A	N/A
HEIGHT ABOVE GROUND	670mm	670mm	670mm	670mm	670mm
FOUNDATION DEPTH	1050mm	1050mm	550mm	630mm	630mm
FINISHES AVAILABLE	GV, RC, SS	SS	SS	GV, RC, SS	SS
WALL THICKNESS	5 - 6mm	3.2mm	3.2mm	5 - 6mm	3.2mm
LIFTING WEIGHT	6 – 7kg	9.7kg	9.7kg	N/A	N/A
SHIPPING WEIGHT	38 – 40kg	34.5kg	22.2kg	14 – 16kg	9kg

Note: All fixed bollards are supplied with an overall length of 1300mm and require a minimum foundation depth of 400mm.

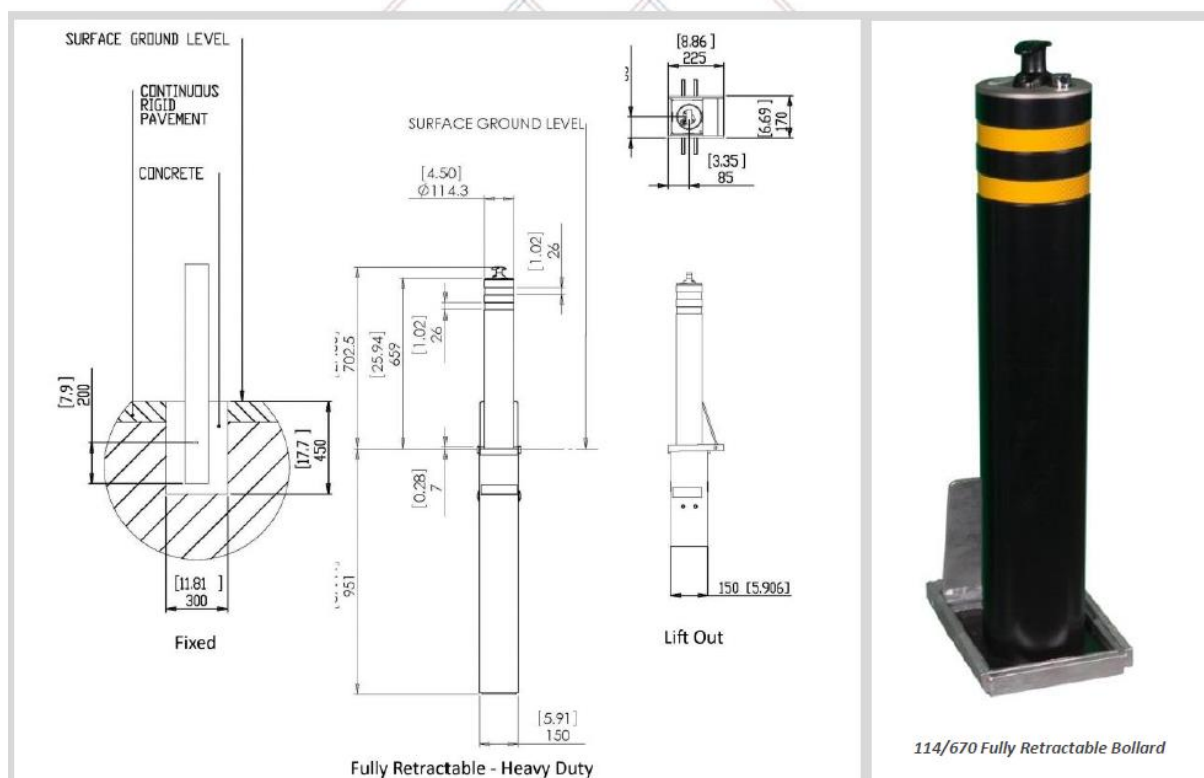


90 SQUARE BOLLARD STATISTICS

	FULLY RETRACTABLE (without lift-assist)	FULLY RETRACTABLE (with lift-assist)	LIFT-OUT	STATIC
BOLLARD DIAMETER	90mm	90mm	90mm	90mm
CASING DIAMETER	150mm	150mm	150mm	N/A
HEIGHT ABOVE GROUND	670mm	670mm	670mm	670mm
FOUNDATION DEPTH	1050mm	1050mm	550mm	630mm
FINISHES AVAILABLE	GV, RC	GV, RC	GV, RC	GV, RC
WALL THICKNESS	6mm	6mm	6mm	6mm
LIFTING WEIGHT	15.7kg	6.0kg	15.7kg	N/A
SHIPPING WEIGHT	39.2kg	39.2kg	28.2kg	15.7kg

Key: GV – Galvanised, RC – RAL colour

Note: All fixed bollards are supplied with an overall length of 1300mm and require a minimum foundation depth of 300mm.

Technical drawing for the 90 Square Bollard Range

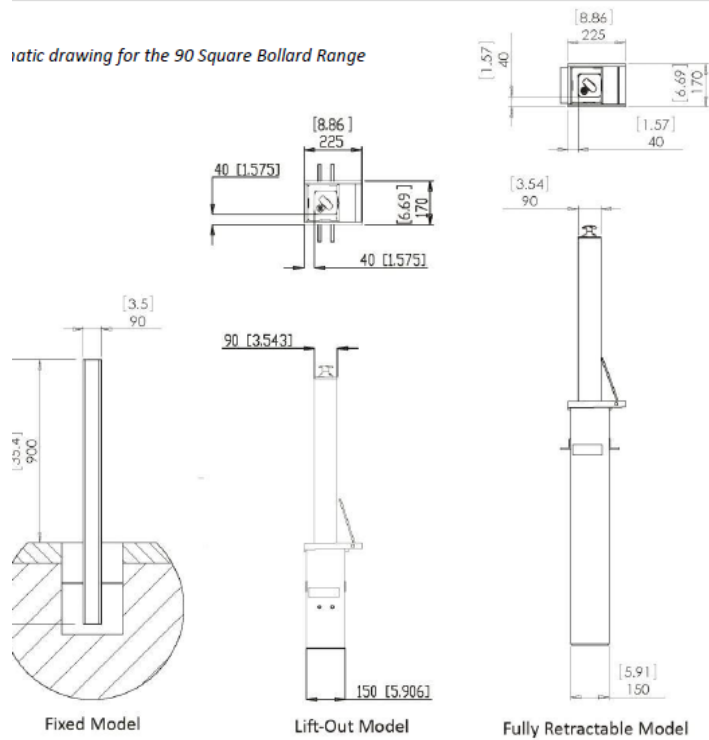

90 Square Fully Retractable Bollard